



KONICA MINOLTA

NEW

COLOR READER CR-20

1

Simple operation shows colorimetric values for samples in various forms, from solids to powders, pastes, etc. in a instant.

**Simple basic operation. Just three steps:
Switch on → Do white calibration → Measure samples**

Lightweight and compact!

Can display results in any of eight color spaces and colorimetric indexes!

**Konica Minolta's
new Color Reader Series
has arrived !**



Giving Shape to Ideas

Main features

1 Display data in a variety of color spaces and colorimetric indexes

You can select one color space or color index for the measurement data among the eight color spaces and colorimetric indexes available: L*a*b*, L*C*h, Yxy, Munsell, WI (CIE/ASTM E 313-96), Tint (CIE/ASTM E 313-96), YI (ASTM E 313-96)

2 Averaging function

If sample color is uneven, you can measure several points and then obtain the average result by pressing the Average button.

3 Data Memory

Using the PC application stored in the CR-20, you can set the instrument to store data internally. (Memory capacity: 1,000 data)


Other features

1 A protective glass


The CR-20's tip has a protective glass plate, so you can measure all kinds of samples such as powders, pastes, and wet objects, directly.

2 Printer

By connecting a printer to the CR-20, you can print out measured data.

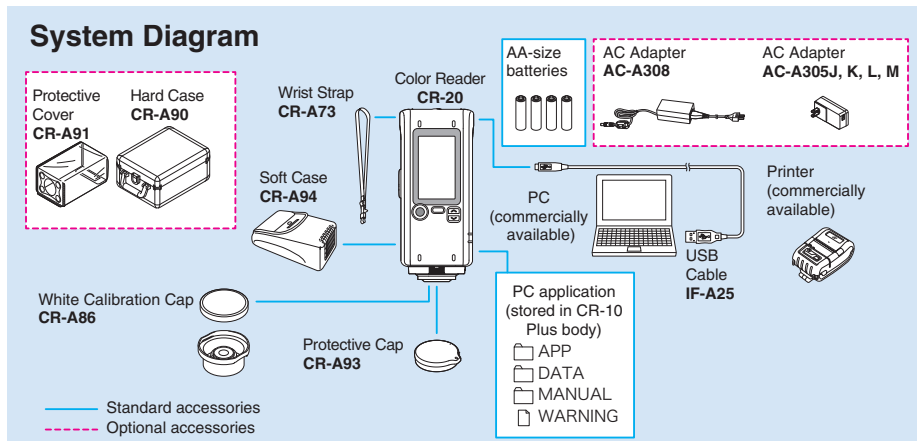

Dimensions (Units: mm)

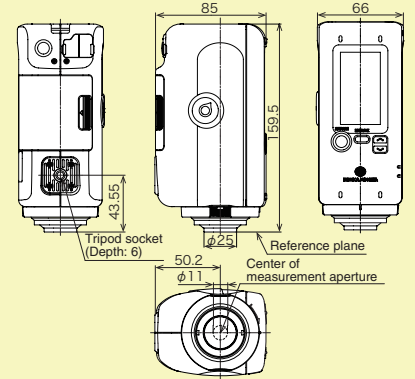

Main Specifications

Model	Color Reader CR-20
Illumination/viewing system	8° : de (8°illumination angle/diffuse viewing: specular component excluded) (conforms to DIN 5033 Teil 7, JIS Z 8722 condition d, ISO 7724/1, CIE No. 15, ASTM E 1164)
Detector	Silicon photocells (6 pcs.)
Light source	Pulsed xenon lamps
Measurement time	Approx. 1 sec.
Battery performance	Approx. 2,000 measurement at 10-sec. intervals when using alkaline-manganese batteries
Measurement area	Approx. : ø8 mm
Repeatability	Standard deviation within ΔE*ab 0.1 (when a white calibration plate is measured 30 times at 10-second intervals)
Display languages	English, Japanese
Interface	USB2.0
Observer	10° Standard Observer
Illuminant	D65
Display data	Colorimetric data, average (up to 999 times)
Color spaces	L*a*b*, L*C*h, Yxy, XYZ, Munsell (D65)
Colorimetric Indexes	WI (CIE/ASTM E 313-96), Tint (CIE/ASTM E 313-96), YI (ASTM E 313-96)
Data memory	Sample data (up to 1,000)
Operation temperature/ humidity range	0 to 40°C, relative humidity 85% or less (at 35°C) with no condensation
Storage temperature/ humidity range	-20 to 40°C, relative humidity 85% or less (at 35°C) with no condensation
Power	4 AA-size alkaline dry batteries or nickel-metal-hydride rechargeable batteries, USB bus power or special AC Adapter
Size (W x H x D)	66 x 159.5 x 85 mm
Weight	420 g (without batteries)

PC system requirement

OS Windows® 7 Professional 32bit, 64bit
Windows® 8 Pro 32bit, 64bit
Windows® 8.1 Pro 32bit, 64bit
(English, Japanese)

- The hardware of the computer system to be used must meet or exceed the recommended system requirements for compatible OS being used.
- One USB2.0 port is necessary.

- The specifications and appearance shown herein are subject to change without notice.
- KONICA MINOLTA, the Konica Minolta logo and symbol mark, and "Giving Shape to ideas" are registered trademarks or trademarks of KONICA MINOLTA, INC.
- Other company names and product names used herein are trademarks or registered trademarks of their respective companies.



SAFETY PRECAUTIONS

For correct use and for your safety, be sure to read the instruction manual before using the instrument.

- Always connect the instrument to the specified power supply voltage. Improper connection may cause a fire or electric shock.
- Be sure to use the specified batteries. Using improper batteries may cause a fire or electric shock.



Certificate No.: LRQ 096094/A
Registration Date: March 3, 1995



Certificate No.: JQA-E-80027
Registration Date: March 12, 1997

KONICA MINOLTA, INC.
Konica Minolta Sensing Americas, Inc.
Konica Minolta Sensing Europe B.V.

Osaka, Japan
New Jersey, U.S.A.
European Headquarter /BENELUX
German Office
French Office
UK Office
Italian Office
Swiss Office
Nordic Office
Polish Office
SE Sales Division
Beijing Office
Guangzhou Office
Chongqing Office
Qingdao Office
Wuhan Office

Konica Minolta (CHINA) Investment Ltd.

Konica Minolta Sensing Singapore Pte Ltd.
Konica Minolta, Inc.
Konica Minolta, Inc.

Optics Company, Korea
Optics Company, Sensing Business
Thailand Representative Office

Phone : 888-473-2656 (in USA), 201-236-4300 (outside USA)
Nieuwegein, Netherlands **Phone** : +31 (0)30 248-1193
München, Germany **Phone** : +49 (0)89 4357 156 0
Roissy CDG, France **Phone** : +33 (0)1 80 11 10 70
Warrington, United Kingdom **Phone** : +44 (0)1925 467300
Cinisello Balsamo, Italy **Phone** : +39 02849488.00
Dietikon, Switzerland **Phone** : +41 (0)43 322-9800
Västra Frölunda, Sweden **Phone** : +46 (0)31 7099464
Wroclaw, Poland **Phone** : +48 (0)71 33050-01
Shanghai, China **Phone** : +86-(0)21-5489 0202
Beijing, China **Phone** : +86-(0)10-8522 1551
Guangdong, China **Phone** : +86-(0)20-3826 4220
Chongqing, China **Phone** : +86-(0)23-6773 4988
Shandong, China **Phone** : +86-(0)532-8079 1871
Hubei, China **Phone** : +86-(0)27-8544 9942
Singapore **Phone** : +65 6563-5533
Seoul, Korea **Phone** : +82 (0)2-523-9726
Bangkok, Thailand **Phone** : +66-2361-3730

Fax : 201-785-2482
Fax : +31 (0)30 248-1280
Fax : +49 (0)89 4357 156 99
Fax : +33 (0)1 80 11 10 82
Fax : +44 (0)1925 711143
Fax : +39 02849488.30
Fax : +41 (0)43 322-9809
Fax : +48 (0)71 734 52 10
Fax : +86-(0)21-5489 0005
Fax : +86-(0)10-8522 1241
Fax : +86-(0)20-3826 4223
Fax : +86-(0)23-6773 4799
Fax : +86-(0)532-8079 1873
Fax : +86-(0)27-8544 9991
Fax : +65 6560-9721
Fax : +82 (0)2-523-9729
Fax : +66-2361-3771

Addresses and telephone/fax numbers are subject to change without notice. For the latest contact information, please refer to the KONICA MINOLTA Worldwide Offices web page :

<http://konicaminolta.com/instruments/network>